



www.mefmag.com

Middle East Food

مأكولات الشرق الأوسط

June 2008 / Vol. XXIV - Issue 6
حزيران (يونيو) ٢٠٠٨ مجلد ٢٤ - عدد رقم ٦

Serving the Food, Beverage, Ingredients & Packaging Sectors in the Middle East & North Africa - Since 1985
تخدم قطاعات المأكولات والمشروبات الخفيفة والمكونات والتغليف في الشرق الأوسط وشمال أفريقيا - منذ ١٩٨٥

GOING NATURAL Pays Back

(P.10)

**MENA's Multibillion-Dollar
Hospitality Industry**
(P.22)

**Poultry Industry
Bounces Back**
(P.31)



Published by CPH World Media
تصدر عن سي بي إنش ورلد ميديا

Helping Advance the Middle East & North Africa - Since 1977
تساعد بتطوير الشرق الأوسط وشمال أفريقيا - منذ ١٩٧٧

www.cphworldmedia.com

The Most Efficient Distance between Two Points

When bulk material characteristics, process parameters or space restrictions call for a flexible screw conveyor



1. Principle of operation

In basic form, a flexible screw conveyor consists of a spring steel or stainless steel, flexible screw that is enclosed in a flexible or rigid plastic tube, or a rigid steel tube, and driven by an electric motor normally located at the discharge end of the conveyor.

The intake end of the conveyor tube is typically equipped with a charging adapter—a U-shaped trough that connects to the outlet of a hopper or directly to the outlet of process equipment such as a bulk bag discharger, bag dump station, grinder, crusher, screener, blender, reactor or storage vessel of any kind.



Deciding on the single most efficient method to move your material from point A to point B is a matter of simple deduction:

just match your material flow characteristics, process parameters and space limitations to the performance windows and dimensional restrictions of conveyors in contention.

Then factor-in purchase, maintenance, labor and cleaning costs, and voila', your conveyor choice becomes clear. Because the performance, size and cost of conveying methods vary widely, only a general knowledge of different conveyor types is necessary to determine which is optimal for you, assuming you possess detailed knowledge of your application. Armed only with the fundamentals outlined below, you can therefore determine whether your application is handled most efficiently by a conveyor that contains a flexible screw.

The flexible screw passes through the charging adapter trough, exposing a section of the screw to material flowing into the trough from above. When rotating, the exposed section of screw feeds material into the outer tube, where it is then propelled through the tube by the enclosed portion of the screw.

A phenomenon resulting from the loose fit of a rotating flexible screw within a tube filled with bulk material, is that the screw automatically self-centers within the tube, providing clearance between the screw and tube wall. This affords sufficient space for particles to flow without damage, depending on the fragility and



size of particles being conveyed.

A removable clean-out cap covers the intake end of the conveyor tube, permitting rapid emptying and flushing of the tube, as well as disassembly and wash-down of components.

Because the intake end of the screw requires no bearing, and since the discharge end is coupled to the motor drive above and/or beyond the point at which material exits the discharge spout, material does not come in contact with seals or bearings. The flexible screw is therefore the only moving part contacting material.

2. Matching application requirements with conveyor attributes

A flexible screw conveyor is your most likely choice if its list of distinguishing capabilities closely matches that of your requirements, or if an individual capability exclusive to a flexible screw solves an individual problem of key concern.

Compare your needs with the following list of flexible screw conveyor attributes:

One moving part contacting material

The only moving part contacting material

in a flexible screw conveyor is a rugged flexible screw, which is directly driven by an electric motor. This simple design does not require the filters, cyclone separators, internal bearings, and other moving parts found on pneumatic conveyors, bucket elevators, rigid augers, drag chains, and/or aero-mechanical conveyors—parts that can add initial cost, require maintenance, wear out, breed contamination, and/or break down.

Conveys free- and non-free-flowing materials including blends

A flexible screw conveyor can transport bulk materials ranging from large pellets to sub-micron powders—both free-flowing and non-free-flowing—including difficult to handle products that pack, cake, seize, fluidize, plug, or smear. Materials range from fine powders such as fumed silica, compressible materials such as titanium dioxide, and dense materials such as metal powder, to friable materials such as fiberglass, materials that fluidize such as carbon black, and materials comprised of particle sizes to 25mm such as nuts. The gentle rolling action created by the rotating screw prevents the separation of blended products, even those comprised of disparate particle sizes and/or densities, throughout the entire length of the conveyor.



Prevents contamination

A flexible screw conveyor can be fully enclosed to prevent contamination of bulk products and the plant environment, while preserving the moisture and temperature levels of materials being conveyed.

All interior surfaces are smooth, and can be easier to clean than conveyors in which material contacts internal bearings, seams, filters or other internal components.


In addition, the units can be designed and finished to industrial and sanitary standards encompassing chemical, pharmaceutical, food/dairy, plastics, paint, mining, packaging and other applications.

Conveys in any direction

A flexible screw conveyor can move powder and bulk solid materials vertically, horizontally, or at any angle—over, under, or around obstructions, through small holes in walls or ceilings, around obstructions, over short or long distances, to any interior or exterior plant location. This allows the user to position the intake and discharge ends of the conveyor according to the preferred system layout, or to awkward layouts as in frequent retrofit/upgrade situations.

Typical applications include conveying of materials between storage vessels, bulk bag dischargers, manual bag dump stations, drum dump stations, crushers, screeners, blenders, reactors, packaging equipment, injection molding and extrusion machines and other process equipment.

Gentle product handling

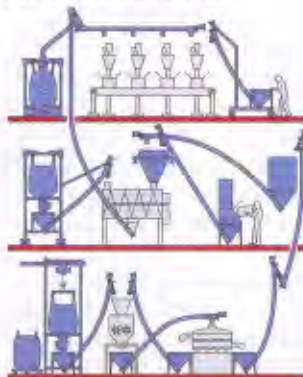

Depending on particle fragility and size, a flexible screw conveyor can move materials with little or no breakage or degradation. Clearance afforded between the screw and tube wall by the rotating, self-centering screw can eliminate or minimize the grinding, crushing, and impact damage that can occur with other conveying methods.

Rapid, thorough cleaning

A flexible screw conveyor contains no internal filters or bearings that can trap particles or breed contamination. Cleaning consists of removing the clean-out cap and reversing rotation to evacuate any residual material prior to flushing the smooth interior surfaces with air, water, steam, or cleaning solution. The screw and outer tube can also be removed rapidly for thorough wash-down of individual components.

High reliability, low maintenance

A flexible screw conveyor contains no internal bearings, filters, or separators to wear, breakdown, or require maintenance.

The wear- and fatigue-resistant flexible screw is driven directly by an electric motor. Depending on application parameters, a flexible screw conveyor can be started and stopped repeatedly, even under a full load, with no binding or damage to the unit.

Economical to purchase, install

The lack of internal bearings, gears, filters, or chains—and external compressors, blowers, and separators—can make flexible screw conveyors less costly to build and operate than other conveyors. A flexible screw conveyor can also be economical to install, since the intake and discharge ends can be positioned where desired, without exact conveyor routing, reducing the need to reconfigure other upstream and downstream process equipment.

Mobile configurations

Flexible screw conveyors can be caster-mounted on frames with conveyor support booms for in-plant mobility, avoiding the cost of multiple stationary units.

Multiple discharge point systems

Horizontally oriented flexible screw conveyors can feed multiple packaging machines, molding machines, and process equipment simultaneously or individually. They can also convey bulk material over long distances, feed multiple discharge points selectively, or top off all points on a timed cycle through manual or automatic slide gate valves.

Volumetric feeding

A flexible screw conveyor can simultaneously meter and convey bulk solid products, since the units can be equipped with AC or DC variable speed drives and hoppers with flow promotion devices for continuous feeding of both free- and non-free-flowing materials.


Weigh batching and weigh feeding systems

“Gain-in-weight” batching systems consist of individual or multiple flexible screw conveyors discharging into a central weigh hopper or other process equipment, which is equipped with load cells. Gain-in-weight information is transmitted to a central programmable controller, which in turn controls each conveyor. The batch sequence can be initiated by a start button or by external contact closure. The controller then activates each conveyor, in sequence, to load each ingredient into the central weigh hopper,

first at high speed, then at dribble speed before stopping the conveyor when the target batch weight has been reached.

After each conveyor has deposited its ingredient, the entire batch can be automatically delivered to process equipment, storage vessels, packaging lines or process equipment.

Flexibility of the conveyor tube allows the weigh hopper to be positioned directly above a blender or any other process equipment. Since the system functions as both weigh feeder and conveyor, it can eliminate the need for separate equipment.

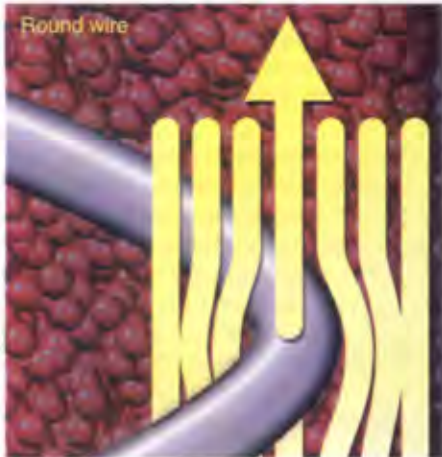

The rounded flight surface of round wire screws imparts the material with directional forces that propel it through the tube, and relatively high radial forces that create an effective bearing between the screw and tube wall throughout the length of the conveyor. The material bearing surface causes the screw to self-center within the tube, preventing it from contacting the tube wall throughout



its entire length, even when the screw/tube assembly is curved, assuming it has been correctly engineered.

These screws are fabricated from spring steel or stainless steel that is square or rectangular in profile. Flat bearing surfaces impart greater directional force and lesser radial force (and material compression) than do round wire screws. Flat wire screws are therefore frequently employed to convey products that tend to compress, as well as fragile materials, low mass materials and those comprised of the finest particle sizes.

Avoiding conveyor limitations

Since every mode of conveying also possesses inherent limitations, each must be identified and ruled unimportant, or less important than corresponding attributes, before deeming a flexible screw conveyor to be the most compromise-free alternative for your application.

Material evacuation

Flexible screw conveyors, like other mechanical conveyors, do not generally evacuate material completely when operating in a forward direction. The clean-out cap can be removed, however, and the screw rotation reversed to fully evacuate residual material for reasons of cleaning and/or material changeovers.

Gentle product handling

While flexible screw conveyors can have less deleterious effect on materials than do methods that tend to grind, crush, or impact bulk products, not all materials can be conveyed damage-free. A percentage of large, brittle flakes or large, soft particles may, for example, incur breakage, particularly through long runs or steep inclines in a flexible screw conveyor. Proper engineering of a flexible screw conveyor system, however, can eliminate or minimize these effects.

Capacity requirements

Flexible screw conveyors are currently utilized for applications having capacity requirements less than 50 tons per hour (per conveyor), explaining why they are infrequently employed for off-loading of ships or railcars.

3. Conclusion

If the characteristics of a flexible screw conveyor align neatly with your material characteristics and process parameters, your next step is to provide material samples and application details to a flexible screw conveyor application engineer, who can suggest the optimum system for integration with your new or existing process in the form of detailed CAD drawings, specifications and guaranteed performance ratings. Should your application call for capabilities beyond those outlined above, a fundamental knowledge of other relevant modes of conveying will enable you to determine which incurs the fewest number of compromises, or which best solves your most critical application problems. ■

Source:

David Boger*
Vice President Sales and Marketing Flexicon Corporation, Flexicon (Europe) Ltd.
89 Lower Heme Road
Heme, Heme Bay
Kent CT6 7PH UK
+44 (0)1227 374710
sales@flexicon.co.uk
www.flexicon.com

تعمد عملية انتقاء الطريقة الفضلى لنقل المواد من نقطة الى أخرى على طريقة استنتاجية سهلة فعا عليك الا مقارنة مميزات موادك الانشائية و عمليات الانتاج والمساحة المتوفرة بأداء ومحدودية المساحة الخاصة بالنواقل المستعملة، يضاف الى ذلك كلفة الشراء والصيانة واليد العاملة والتنظيف فيصبح خيارك أوضح. يتغير أداء وحجم كلفة النقل بشكل واسع لذلك تكفي المعرفة العامة لأنواع النواقل المختلفة لتحديد النوع الأفضل لك، لكن يتوجب عليك في المقابل ان تكون قد كونت معرفة دقيقة لتطبيقات عمالك. لذلك يقدم هذا المقال المعلومات الاساسية التي يجب ان تحملها لتحديد بشكل أكيد اذا كان ناقل اللولب المرن هو الناقل المناسب لك. يرتكز ناقل اللولب المرن بشكل أساسي على لولب فولاذي مرن مكون من الحديد غير القابل للصدأ في أنبوب بلاستيكي مرن أو صلب أو أنبوب فولاذي صلب يعمل على محرك كهربائي على طرف التفريغ. اما طرف المدخل، فهو مجهز بمهني، للتعبئة وحوض على شكل حرف "يو" يربط الناقل بمنفذ معدات التصنيع مثل اكياس التفريغ او الجلاخات او الجراشات او المغربلات او الخلاطات او مستوعبات التخزين. قد يكون ناقل اللولب المرن الخيار الأفضل للإستعمال اذا تطابق جدول قدراته المتميزة مع متطلبات العمل او اذا برزت الحاجة الى احدى مميزات هذه الماكينة الحصرية والتي تساهم بحل مشكلة محددة. ان احدى المميزات الاساسية للناقل موضوع الدراسة هي وجود قطعة متحركة واحدة على تماس بالمواد المنقولة معا يخفف من كلفة الصيانة، كما إنه صالح لنقل المواد ذات الدفق الحر وغير الحر بما فيها الخلاط وهو يمتع التلوث ويسمح بالنقل في اتجاهات مختلفة ويتعامل مع المنتجات سهلة العطب. من جهة أخرى، تتميز عملية التنظيف بالسرعة والسهولة بالإضافة إلى الإعتدالية العالية والصيانة المنخفضة وانخفاض كلفة الشراء والتركيب والتشكيلات المتحركة ووجود نظام تعدد نقاط التفريغ. بعد التأكد من توافق ناقل اللولب المرن مع متطلبات الانتاج المختلفة، تركز الخطوة الثانية على توفير عينات من المواد التي سيتم العمل بها وتفاصيل عن تطبيقات الانتاج الى مهندس متخصص في هذه التقنية لكي يقترح النظام الأمثل للإستعمال عبر الخرائط المفصلة والمواصفات وتعديرات الإنتاج. اما انا تطلبت التطبيقات قدرات أعلى من المشار اليها فستساعدك المعرفة الاساسية لطرق النقل الأخرى على اختيار التقنية التي تتطلب العدد الأقل من الحلول الوسطى.

REFER TO RIN 15 ON PAGE 74