


PRODUCT CONFIGURATIONS



EE-1203

Mobile Screener-Conveyor Handles Non-Free-Flowing Materials

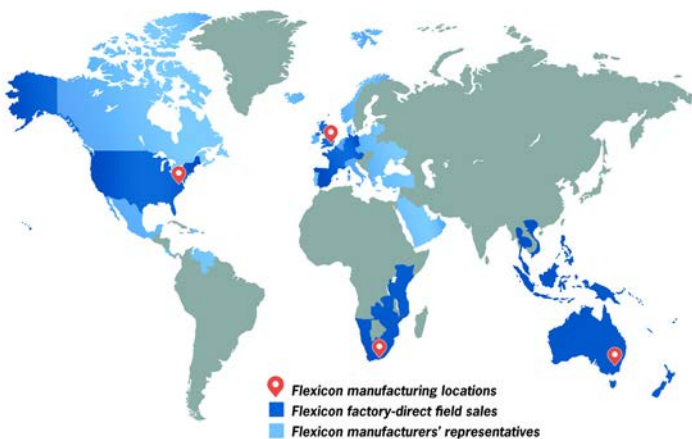

flexicon®

USA

FLEXICON CORPORATION
Tel: 1 888 FLEXICON
(1 888 353 9426)
Tel: 1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 (0)1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 (0)7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 (0)41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN S.L.
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON (EUROPE) LTD
Tel: +33 (0)7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

MALAYSIA

FLEXICON SINGAPORE PTE LTD
Tel: +60 10 282 2400
E-mail: sales@flexicon.com.my
Web: www.flexicon.com.my

Mobile Screener-Conveyor Handles Non-Free-Flowing Materials

This BEV-CON™ Mobile Flexible Screw Conveyor with Round Vibratory Screener removes oversize particles and reduces soft agglomerates before conveying on-size bulk materials from powders and large pellets that flow freely, to non-free-flowing products that pack, cake, seize or smear due to compression or frictional heat.

Ready to plug in and run, the caster-mounted system can be rolled into position, locked in place with jacking footpads, and connected to an upstream material source in several minutes.

A rugged flexible screw with geometry optimized for difficult-to-move products, is the only moving part contacting material, and is driven above the point at which material exits the conveyor, preventing material contact with seals, and associated bearing failure and product contamination.

As the screw rotates, it self-centers within the conveyor tube, providing clearance between the screw and tube wall, eliminating or minimizing product degradation.

Aside from the smooth polymer conveyor tube, all material contact surfaces are of stainless steel finished to food, pharmaceutical or industrial standards.

A lower clean-out cap can be removed to flush the smooth interior surfaces with steam, water or cleaning solutions, or to fully remove the flexible screw for cleaning and inspection.



Flexicon's new BEV-CON™ Mobile Flexible Screw Conveyor system screens and elevates free- and non-free-flowing bulk materials at multiple plant locations and allows rapid sanitizing.