


# PRODUCT CONFIGURATIONS



GG-0343

## Low Profile Bulk Bag Filler with Explosion Proof Controls

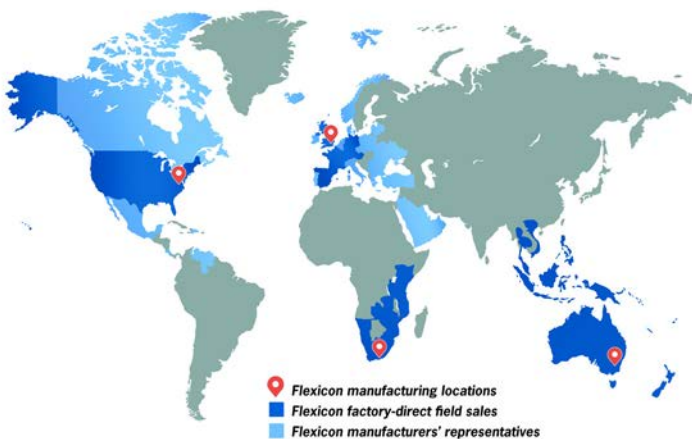

**flexicon®**

### USA

FLEXICON CORPORATION  
Tel: 1 888 FLEXICON  
(1 888 353 9426)  
Tel: 1 610 814 2400  
E-mail: [sales@flexicon.com](mailto:sales@flexicon.com)  
Web: [www.flexicon.com](http://www.flexicon.com)

### UK

FLEXICON (EUROPE) LTD  
Tel: +44 (0)1227 374710  
E-mail: [sales@flexicon.co.uk](mailto:sales@flexicon.co.uk)  
Web: [www.flexicon.co.uk](http://www.flexicon.co.uk)

### AUSTRALIA

FLEXICON CORPORATION  
(AUSTRALIA) PTY LTD  
Tel: +61 (0)7 3879 4180  
E-mail: [sales@flexicon.com.au](mailto:sales@flexicon.com.au)  
Web: [www.flexicon.com.au](http://www.flexicon.com.au)

### SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD  
Tel: +27 (0)41 453 1871  
E-mail: [sales@flexicon.co.za](mailto:sales@flexicon.co.za)  
Web: [www.flexicon.co.za](http://www.flexicon.co.za)

### SPAIN

FLEXICON EUROPE SPAIN S.L.  
Tel: +34 930 020 509  
E-mail: [ventas@flexicon.es](mailto:ventas@flexicon.es)  
Web: [www.flexicon.es](http://www.flexicon.es)

### FRANCE

FLEXICON (EUROPE) LTD  
Tel: +33 (0)7 61 36 56 12  
E-mail: [ventes@flexicon.fr](mailto:ventes@flexicon.fr)  
Web: [www.flexicon.fr](http://www.flexicon.fr)

### GERMANY

FLEXICON EUROPE GmbH  
Tel: +49 173 900 78 76  
E-mail: [vertrieb@flexiconeurope.de](mailto:vertrieb@flexiconeurope.de)  
Web: [www.flexicondeutschland.de](http://www.flexicondeutschland.de)

### SINGAPORE

FLEXICON SINGAPORE PTE LTD  
Tel: +65 6778 9225  
E-mail: [sales@flexicon.com.sg](mailto:sales@flexicon.com.sg)  
Web: [www.flexicon.com.sg](http://www.flexicon.com.sg)

### INDONESIA

FLEXICON SINGAPORE PTE LTD  
Tel: +62 81 1103 2400  
E-mail: [sales@flexicon.co.id](mailto:sales@flexicon.co.id)  
Web: [www.flexicon.co.id](http://www.flexicon.co.id)

### MALAYSIA

FLEXICON SINGAPORE PTE LTD  
Tel: +60 10 282 2400  
E-mail: [sales@flexicon.com.my](mailto:sales@flexicon.com.my)  
Web: [www.flexicon.com.my](http://www.flexicon.com.my)

# Low Profile Bulk Bag Filler with Explosion Proof Controls

This TWIN-CENTERPOST™ Bulk Bag Filler features XP controls and reduced height posts for low headroom applications. It is equipped with a manual fill head height adjustment to accommodate smaller bag sizes, pneumatically retractable bag hooks, an inflatable connector to seal the bag inlet spout, and a feed chute outlet port for dust-free air displacement during filling.

A NEMA 7/9 explosion-proof electrical system controls the automated vibratory densification/deaeration deck which stabilizes the bag for storage and shipment.

The dual post frame is a patented design that maximizes strength and improves accessibility to bag hooks while simplifying construction and reducing cost. It is constructed of carbon steel with durable industrial coating, with product contact surfaces of stainless steel. Also available in all-stainless construction finished to sanitary standards, it is the first bulk bag filler to receive USDA acceptance.

The filler is available with a FLEXICON® flexible screw conveyor, FLEXI-DISC® tubular cable conveyor or PNEUMATI-CON® dilute-phase pneumatic conveying system to deliver a full range of bulk materials from nearby or distant upstream sources.



*Flexicon low profile TWIN-CENTERPOST™ Bulk Bag Filler has XP controls for deaeration deck.*