


PRODUCT CONFIGURATIONS



GG-0594

Automated Bulk Solids Drum Dumping System

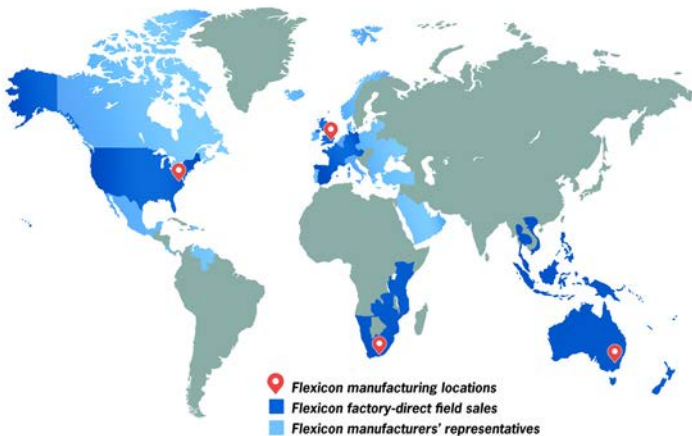

flexicon®

USA

FLEXICON CORPORATION
Tel: 1 888 FLEXICON
(1 888 353 9426)
Tel: 1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 (0)1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 (0)7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 (0)41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN S.L.
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON (EUROPE) LTD
Tel: +33 (0)7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

MALAYSIA

FLEXICON SINGAPORE PTE LTD
Tel: +60 10 282 2400
E-mail: sales@flexicon.com.my
Web: www.flexicon.com.my

Automated Bulk Solids Drum Dumping System

This new TIP-TITE® Drum Dumping System from Flexicon automatically rolls drums containing bulk material into position, dumps the material into downstream equipment and rolls empty drums out of the dumping station, allowing safe, high-capacity transfer from drums of all popular sizes weighing up to 750 lb (340 kg).

Once full drums are rolled onto the dumping station platform, a hydraulic cylinder raises and seats the drum rim against a discharge hood. A second hydraulic cylinder then tips the drum to an angle of 45, 60 or 90 degrees with a motion-dampening feature. At full rotation, the slide gate opens to allow controlled discharge of material into downstream process equipment. After the empty container is returned to its upright position, the rolling motion is reversed, and the container is halted in front of a pneumatically-actuated pusher, which transfers the empty drum to the return conveyor for removal. Meanwhile, another full drum rolls into position on the dumping platform.

Photoelectric sensors located along the powered roller conveyor relay the position of empty and full drums to the system controller, which actuates the conveyor to advance full and empty drums upon completion of each dumping cycle.

The system is also offered in high-lift configurations for dumping into elevated receiving equipment, and in open-chute and dust-free TIP-TITE designs for dumping of boxes, bins, pails and other containers.



TIP-TITE® Dumping System for drums containing bulk solids allows safe, high-capacity transfer of materials by automatically positioning, dumping and removing of drums in repeated cycles