


PRODUCT CONFIGURATIONS



JJ-0452

Mobile Bulk Bag Discharger with Mobile Flexible Screw Conveyor, Hopper

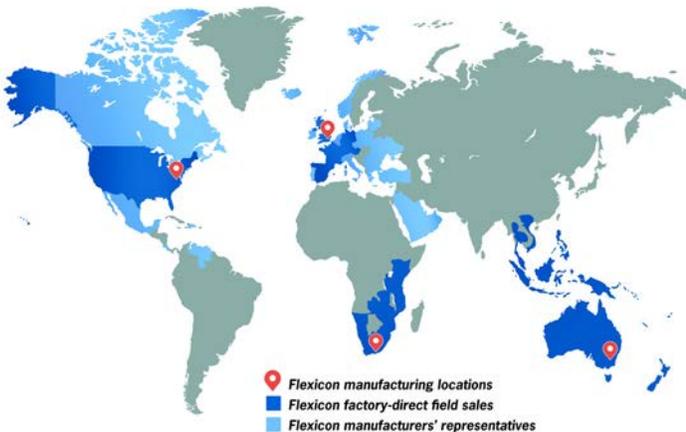

USA

FLEXICON CORPORATION
Tel: 1 888 FLEXICON
(1 888 353 9426)
Tel: 1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 (0)1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 (0)7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 (0)41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN S.L.
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON (EUROPE) LTD
Tel: +33 (0)7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

MALAYSIA

FLEXICON SINGAPORE PTE LTD
Tel: +60 10 282 2400
E-mail: sales@flexicon.com.my
Web: www.flexicon.com.my

Mobile Bulk Bag Discharger with Mobile Flexible Screw Conveyor, Hopper

Flexicon Mobile Bulk Bag Discharger with Mobile Flexible Screw Conveyor allows dust-free discharging of bulk solid materials and conveying to downstream process equipment or storage vessels throughout the plant.

Mounted on locking casters, the BULK-OUT® BFF Series discharger has four adjustable extension posts to accommodate bulk bags 36 in. to 84 in. (914 to 2134 mm) tall. The removable bag-lifting frame with Z-CLIP™ strap holders allows bulk bags to be attached at ground level, then forklifted into receiving cups on the discharger frame.

A SPOUT-LOCK® clamp ring atop a pneumatically-actuated TELE-TUBE® telescoping tube secures the clean side of bag spout to the clean side of the equipment, and exerts continuous downward tension on the bag as it empties and elongates, promoting flow and evacuation. A vent port with filter sock contains dust.

Additional flow is afforded by FLOW-FLEXER® bag activators that raise and lower opposite bottom sides of the bag at timed intervals into a steep "V" shape, and top-mounted POP-TOP™ extension devices that elongate the entire bag, promoting total discharge with no manual intervention.

The discharge housing of the mobile flexible screw conveyor is supported by a mast affixed to the mobile discharger frame, allowing the transfer of free- and non-free-flowing bulk materials to multiple destinations.

The flexible screw is the only moving part contacting material and is driven by an electric motor beyond the point at which material is discharged, preventing material contact with seals.

The entire unit can be rolled to a cleaning station. A lower clean-out cap on the conveyor tube can be removed to flush the smooth interior surfaces with steam, water or cleaning solutions, or to fully remove the flexible screw for cleaning and inspection.

The system is available in carbon steel with durable industrial coating, with stainless steel material contact surfaces, or in all-stainless steel finished to industrial, food, dairy or pharmaceutical standards.



Flexicon Mobile Bulk Bag Discharger- Conveyor System can transfer bulk materials to destinations throughout the plant.