


PRODUCT CONFIGURATIONS



Q-0628

Low Profile Bulk Bag Filler

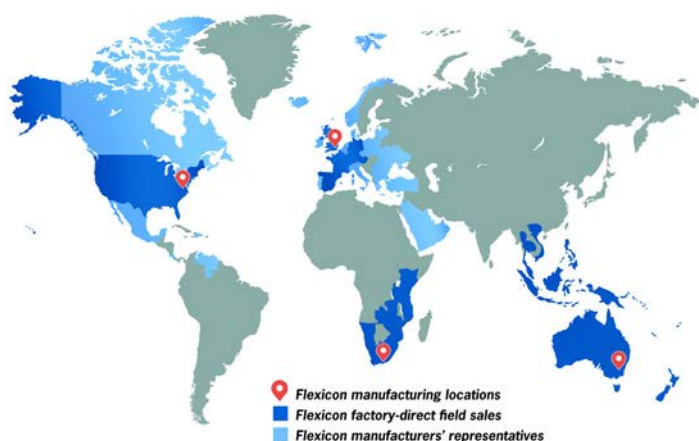

flexicon®

USA

FLEXICON CORPORATION
Tel: 1 888 FLEXICON
(1 888 353 9426)
Tel: 1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 (0)1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 (0)7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 (0)41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN S.L.
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON (EUROPE) LTD
Tel: +33 (0)7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

MALAYSIA

FLEXICON SINGAPORE PTE LTD
Tel: +60 10 282 2400
E-mail: sales@flexicon.com.my
Web: www.flexicon.com.my

Low Profile Bulk Bag Filler

Allows removal of loaded bulk bags using a pallet jack, eliminating the need for a forklift

Flexicon's Low Profile Bulk Bag Filler allows removal of loaded bags using a pallet jack, eliminating the need for a forklift.

The patented TWIN-CENTERPOST™ design maximizes strength and improves accessibility to bag hooks while simplifying construction and reducing cost.

Standard units for low cost, low volume filling applications are offered with primary bag filling components: manual fill head height adjustment to accommodate all popular bag sizes; pneumatically retractable bag hooks; inflatable cuff to seal the bag inlet spout; and double wall product inlet port with air displacement outlet port for dust-free filling.

Performance can be enhanced by adding a scale system, powered fill head height adjustment, and blower assembly for inflating the bag prior to filling.

The unit is available with an optional Flexicon flexible screw conveyor integrated with the user's upstream process or other material source. The conveyor delivers a full range of free- and non-free-flowing materials, with no separation of blended products, at the high feed rates needed for rapid filling cycles, and steady dribble-feed rates for accurate weighments.

An adjustable fill head accommodates bags from 36 to 72 in. (915 to 1820mm) in height. Frame construction is of carbon steel with durable industrial finish, or stainless steel finished to industrial, food, dairy or pharmaceutical standards.



Flexicon's Low Profile Bulk Bag Filler allows removal of loaded bags using a pallet jack, eliminating the need for a forklift.