


PRODUCT CONFIGURATIONS



X-0607

TIP-TITE Drum Dumper

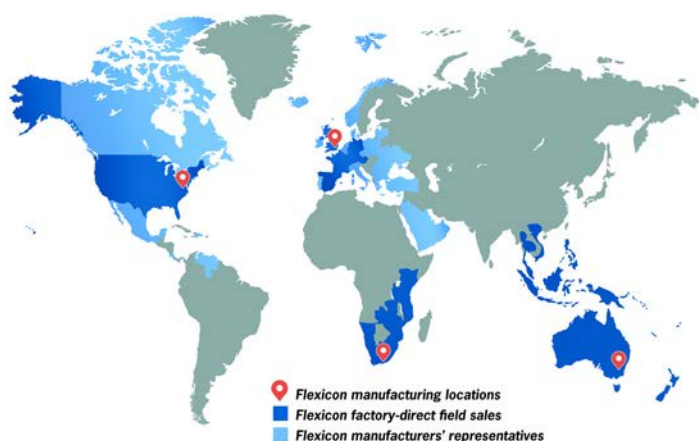

flexicon®

USA

FLEXICON CORPORATION
Tel: 1 888 FLEXICON
(1 888 353 9426)
Tel: 1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 (0)1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 (0)7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 (0)41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN S.L.
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON (EUROPE) LTD
Tel: +33 (0)7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

MALAYSIA

FLEXICON SINGAPORE PTE LTD
Tel: +60 10 282 2400
E-mail: sales@flexicon.com.my
Web: www.flexicon.com.my

TIP-TITE® Drum Dumper

This Drum Dumper from Flexicon seals drums against a discharge cone, tips the drum, mates the cone against a gasketed connection, and discharges bulk material dust-free through a slide gate valve.

Trademarked TIP-TITE®, the dumper accommodates drums from 30 to 55 gal (115 to 200 liter).

The drum platform is raised by a single hydraulic cylinder, creating a dust-tight seal between the rim of a drum and the underside of the discharge cone.

A second hydraulic cylinder tips the platform-hood assembly and drum, stopping at dump angles of 45, 60 or 90 degrees with a motion-dampening feature. The vertically oriented cone mates with a gasketed inlet port fitted to the lid of an optional hopper with integral flexible screw conveyor or pneumatic pick-up adapter, or to existing process equipment.

A pneumatically actuated slide gate valve prevents material flow until the discharge cone has been properly seated in the gasketed inlet port.

The drum dumper is available constructed of mild steel with durable industrial finishes, with material contact surfaces of stainless steel, or in all-stainless steel finished to food, dairy, pharmaceutical or industrial standards.





TIP-TITE® Drum Dumper seals drum rim against a discharge cone, tips the drum, mates the cone against a gasketed connection, and discharges bulk material dust-free through a slide gate valve.