


# PRODUCT CONFIGURATIONS



**Z-0896**

## Pneumatic Weigh Filling System

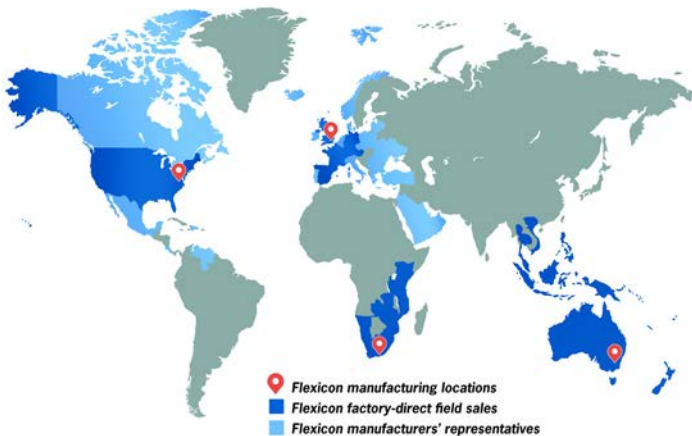

**flexicon®**

### USA

FLEXICON CORPORATION  
Tel: 1 888 FLEXICON  
(1 888 353 9426)  
Tel: 1 610 814 2400  
E-mail: [sales@flexicon.com](mailto:sales@flexicon.com)  
Web: [www.flexicon.com](http://www.flexicon.com)

### UK

FLEXICON (EUROPE) LTD  
Tel: +44 (0)1227 374710  
E-mail: [sales@flexicon.co.uk](mailto:sales@flexicon.co.uk)  
Web: [www.flexicon.co.uk](http://www.flexicon.co.uk)

### AUSTRALIA

FLEXICON CORPORATION  
(AUSTRALIA) PTY LTD  
Tel: +61 (0)7 3879 4180  
E-mail: [sales@flexicon.com.au](mailto:sales@flexicon.com.au)  
Web: [www.flexicon.com.au](http://www.flexicon.com.au)

### SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD  
Tel: +27 (0)41 453 1871  
E-mail: [sales@flexicon.co.za](mailto:sales@flexicon.co.za)  
Web: [www.flexicon.co.za](http://www.flexicon.co.za)

### SPAIN

FLEXICON EUROPE SPAIN S.L.  
Tel: +34 930 020 509  
E-mail: [ventas@flexicon.es](mailto:ventas@flexicon.es)  
Web: [www.flexicon.es](http://www.flexicon.es)

### FRANCE

FLEXICON (EUROPE) LTD  
Tel: +33 (0)7 61 36 56 12  
E-mail: [ventes@flexicon.fr](mailto:ventes@flexicon.fr)  
Web: [www.flexicon.fr](http://www.flexicon.fr)

### GERMANY

FLEXICON EUROPE GmbH  
Tel: +49 173 900 78 76  
E-mail: [vertrieb@flexiconeurope.de](mailto:vertrieb@flexiconeurope.de)  
Web: [www.flexicondeutschland.de](http://www.flexicondeutschland.de)

### SINGAPORE

FLEXICON SINGAPORE PTE LTD  
Tel: +65 6778 9225  
E-mail: [sales@flexicon.com.sg](mailto:sales@flexicon.com.sg)  
Web: [www.flexicon.com.sg](http://www.flexicon.com.sg)

### INDONESIA

FLEXICON SINGAPORE PTE LTD  
Tel: +62 81 1103 2400  
E-mail: [sales@flexicon.co.id](mailto:sales@flexicon.co.id)  
Web: [www.flexicon.co.id](http://www.flexicon.co.id)

### MALAYSIA

FLEXICON SINGAPORE PTE LTD  
Tel: +60 10 282 2400  
E-mail: [sales@flexicon.com.my](mailto:sales@flexicon.com.my)  
Web: [www.flexicon.com.my](http://www.flexicon.com.my)

# Pneumatic Weigh Filling System

A pneumatic gain-in-weight filling system for free-flowing bulk solids conveys and weighs the material, and discharges it into bulk bags.

The filter receiver of the PNEUMATI-CON® vacuum dilute-phase pneumatic conveying system is mounted on load cells, enabling the system controller to weigh incoming material at high rates, and then at steady dribble-feed rates, stopping the flow once an accurate batch weight has been reached.

Pressing a "fill" button on the control panel actuates a bag inflation blower on the TWIN-CENTERPOST™ bulk bag filler to remove creases in the bag, and opens a slide gate valve at the outlet of the filter receiver, allowing the weighed batch to gravity discharge into the bag at high rates, as a vibratory deck densifies the material to stabilize the bag. A secondary set of load cells mounted beneath the bulk bag filler allows the system to confirm the final weight of the filled bulk bag.

A port within the discharge spout vents displaced air and dust to a remote bag house.

The controller then releases the bag straps and deflates the spout seal, allowing the operator to tie-off the spout and remove the filled bag.

Connecting an empty bag consists of attaching the bag straps, pulling the spout over the inflatable collar, and pushing a spout inflator button.

While filled bags are being removed and empty bags attached, a subsequent batch is being conveyed to the filter receiver and weighed, ready for another fill cycle.



*A PNEUMATI-CON® pneumatic conveying system weighs material and discharges it into a TWIN-CENTERPOST™ bulk bag filler at high rates, dust-free.*