


PRODUCT CONFIGURATIONS



Z-1028

Bulk Bag Conditioner with Hoist, Trolley

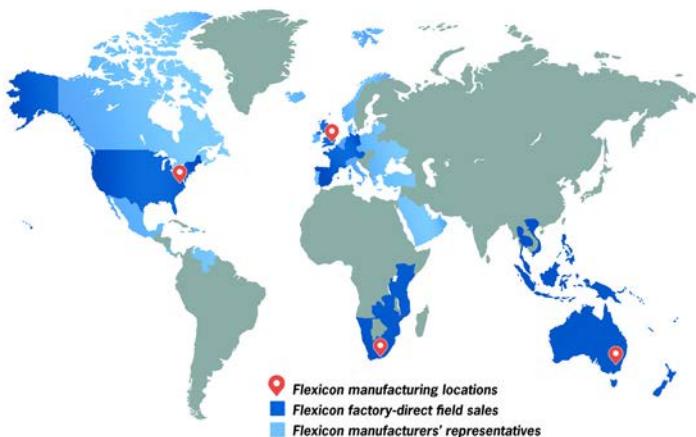

flexicon®

USA
FLEXICON CORPORATION
Tel: 1 888 FLEXICON
(1 888 353 9426)
Tel: 1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK
FLEXICON (EUROPE) LTD
Tel: +44 (0)1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA
FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 (0)7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA
FLEXICON AFRICA (PTY) LTD
Tel: +27 (0)41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN
FLEXICON EUROPE SPAIN S.L.
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE
FLEXICON (EUROPE) LTD
Tel: +33 (0)7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY
FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexicon-europe.de
Web: www.flexicon-deutschland.de

SINGAPORE
FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA
FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

MALAYSIA
FLEXICON SINGAPORE PTE LTD
Tel: +60 10 282 2400
E-mail: sales@flexicon.com.my
Web: www.flexicon.com.my

Bulk Bag Conditioner with Hoist, Trolley

This BLOCK-BUSTER® Bulk Bag Conditioner with two hydraulic rams and specially contoured end plates, presses opposing sides of bulk bags, loosening material that has solidified during storage and shipment, enabling bulk bag unloaders to discharge it through bag spouts.

A cantilevered I-beam with motorized hoist and trolley allows loading and unloading of bulk bags without the use of a forklift. The bag can also be raised and lowered using the hoist, and rotated manually, for conditioning at any height on all sides.

The system controller and hydraulic pump can be mounted on the exterior of the safety cage or remotely. The conditioner is fully enclosed on all four sides for operator safety and includes full-height doors that are interlocked to disallow operation of the system when the doors are open.

The conditioner is recommended for bulk bags containing hygroscopic chemicals, certain spice blends, heat-sensitive products, and other materials prone to solidifying to the point at which pneumatically-actuated flow promotion accessories integral to bulk bag dischargers are inefficient or completely ineffective.

An optional hydraulically-actuated, variable-height turntable allows automated in-frame bag rotation and conditioning of bulk bags at varying heights. The number and pressure of hydraulic ram actuations, the height of the turntable, and the degree of rotation are user-programmable.

The conditioner is offered as a stand-alone unit or integrated with the company's BULK-OUT® bulk bag discharging systems.



Bulk bags can be loaded, raised and lowered using the hoist, and rotated manually, for conditioning at all heights on all sides.