




Flexible Screw Conveyor Quick-Ship Program

GG-0795

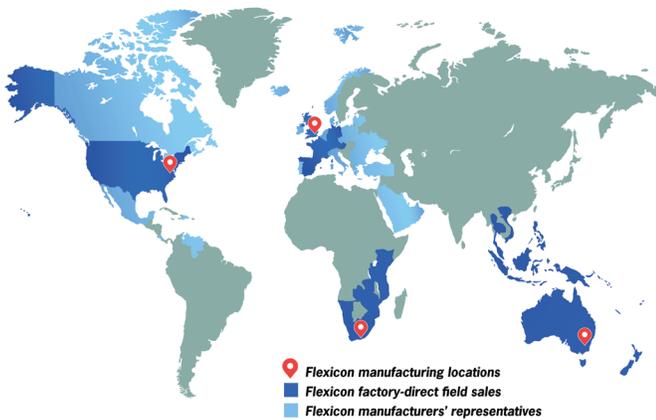

 Flexicon manufacturing locations
 Flexicon factory-direct field sales
 Flexicon manufacturers' representatives

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON EUROPE SAS
Tel: +33 7 61 36 56 12
E-mail: ventes@flexicon.com
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

Flexible Screw Conveyor Quick-Ship Program

Flexible screw conveyors in popular sizes are now available for shipment in two-to-five days as ready-to-assemble packages with Flexicon's Quick-Ship Program, the company announced.

Conveyor tubes and screws offered through the program are supplied in any length from 10 to 40 ft. (3 to 12 m), in diameters from 2.625 to 4.5 in. (67 to 115 mm) OD.

Also included as standard are a stainless steel floor hopper, 45 or 90 degree discharge adapter, TEFC or wash-down duty motor, and UL Listed NEMA 4 control panel.

With the exception of the polymer conveyor tube, all product contact surfaces are of stainless steel. Non-product contact surfaces are of carbon steel construction with durable industrial finish.

Stainless steel screws are supplied in a range of geometries matched to the material being conveyed.

Options include a hopper flow promotion device, hopper cover with unflanged inlet port, hopper screen and NEMA 4 low level sensor.

The conveyors can transport a broad range of bulk materials from large pellets to sub-micron powders, including friable products, abrasives and materials prone to pack, cake, bind or smear, with no separation of blends. Depending on screw geometry selected, material can be conveyed at any angle from horizontal to vertical, in a straight or curved path, through small holes in walls or ceilings.

The screw is driven beyond the point at which material exits the discharge housing, preventing material contact with seals and related issues of bearing failure and product contamination.

The inner screw can be removed through a lower end cap for wash down and inspection and the conveyor tube flushed with water, steam or cleaning solution.



Packaged for shipment in two-to-five days, Flexible Screw Conveyors ordered through Flexicon's Quick-Ship Program are available in any length from 10 to 40 ft (3 to 12 m), in diameters from 2.625 to 4.5 in. (67 to 115 mm) OD.

flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com