




Mobile Sanitary IBC Unloading-Conveying System

JJ-0843

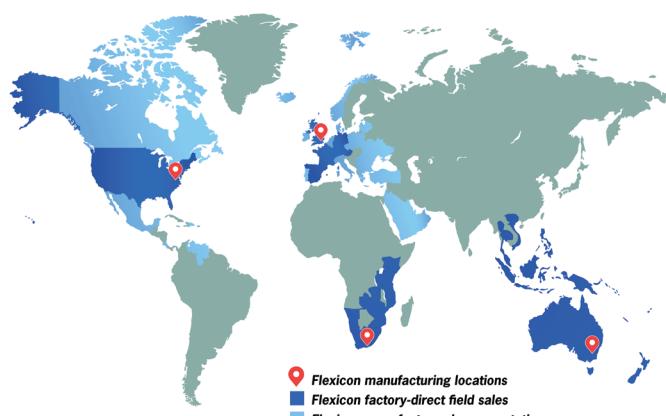

flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON EUROPE SAS
Tel: +33 7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexicon-europe.de
Web: www.flexicon-deutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

Mobile Sanitary IBC Unloading-Conveying System

This Flexicon Mobile Sanitary IBC Unloading and Conveying System transfers contamination-sensitive bulk solid materials from Intermediate Bulk Containers (IBCs) to downstream processes, dust-free.

The discharger frame is mounted on casters for in-plant mobility, while a hinged subframe supporting a surge hopper, flexible screw conveyor and support mast can pivot down for maneuvering through doorways and low-headroom areas.

The IBC frame is forklifted onto receiving cups, which position the IBC outlet onto the surge hopper inlet. Material flowing from the IBC into the charging adapter of a flexible screw conveyor is propelled at an incline, and discharged into elevated process equipment and storage vessels.

The conveyor handles a broad range of free- and non-free-flowing bulk solids ranging from pellets to sub-micron powders with no separation of blended products. The flexible screw is the only moving part contacting material, and is driven by an electric motor positioned beyond the discharge point, preventing material contact with seals.

Ready to plug in and run, the mobile unit can serve multiple functions throughout the plant. It can be rolled to a cleaning station where a lower clean-out cap on the conveyor tube can be removed to flush the smooth interior surfaces with steam, water or cleaning solutions, or to fully remove the flexible screw for cleaning and inspection.

The system is available in carbon steel with durable industrial coating, with stainless steel material contact surfaces, or in all-stainless steel (shown) finished to industrial, food, dairy or pharmaceutical standards.



Flexicon Sanitary Mobile IBC Discharger can be rolled to multiple locations throughout the plant or to a cleaning station for rapid sanitizing.



The support mast, flexible screw conveyor and hopper tilt down to maneuver in low headroom areas.

flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com