




## Tilt-Down Conveyor Ups Flexibility, Convenience

KK-0803

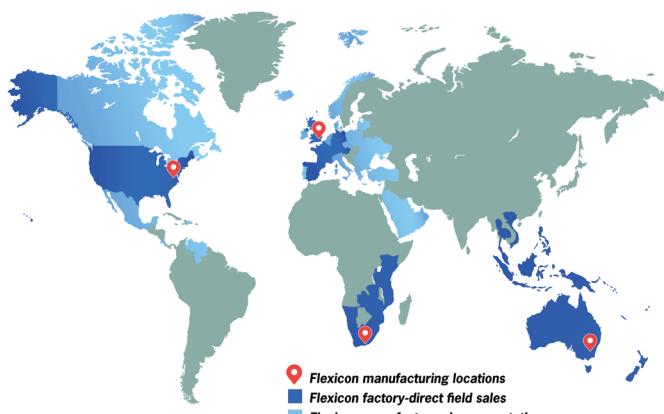

**flexicon®**

### USA

FLEXICON CORPORATION  
Tel: +1 610 814 2400  
E-mail: sales@flexicon.com  
Web: [www.flexicon.com](http://www.flexicon.com)

### UK

FLEXICON (EUROPE) LTD  
Tel: +44 1227 374710  
E-mail: sales@flexicon.co.uk  
Web: [www.flexicon.co.uk](http://www.flexicon.co.uk)

### AUSTRALIA

FLEXICON CORPORATION (AUSTRALIA) PTY LTD  
Tel: +61 7 3879 4180  
E-mail: sales@flexicon.com.au  
Web: [www.flexicon.com.au](http://www.flexicon.com.au)

### SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD  
Tel: +27 41 453 1871  
E-mail: sales@flexicon.co.za  
Web: [www.flexicon.co.za](http://www.flexicon.co.za)

### SPAIN

FLEXICON EUROPE SPAIN  
Tel: +34 930 020 509  
E-mail: ventas@flexicon.es  
Web: [www.flexicon.es](http://www.flexicon.es)

### FRANCE

FLEXICON EUROPE SAS  
Tel: +33 7 61 36 56 12  
E-mail: ventes@flexicon.fr  
Web: [www.flexicon.fr](http://www.flexicon.fr)

### GERMANY

FLEXICON EUROPE GmbH  
Tel: +49 173 900 78 76  
E-mail: vertrieb@flexicon-europe.de  
Web: [www.flexicon-deutschland.de](http://www.flexicon-deutschland.de)

### SINGAPORE

FLEXICON SINGAPORE PTE LTD  
Tel: +65 6778 9225  
E-mail: sales@flexicon.com.sg  
Web: [www.flexicon.com.sg](http://www.flexicon.com.sg)

### INDONESIA

FLEXICON SINGAPORE PTE LTD  
Tel: +62 81 1103 2400  
E-mail: sales@flexicon.co.id  
Web: [www.flexicon.co.id](http://www.flexicon.co.id)

## Tilt-Down Conveyor Ups Flexibility, Convenience

This mobile tilt-down flexible screw conveyor fits restrictive processing situations and offers a low center of gravity, and full accessibility from standing height.

Positioning of the support boom against and parallel to the conveyor tube minimizes the height needed to maneuver the system under doorways and mezzanines, and to fit the conveyor's discharge between process equipment inlets and overhead obstructions. A low center of gravity maximizes stability during operation and when rolling the unit between multiple processing tasks and wash down stations.

When fully lowered, the tilt-down mechanism positions the clean-out cap of the conveyor tube higher off the plant floor, and the conveyor's discharge closer to the floor, allowing removal and re-insertion of the flexible screw from standing height during cleaning and inspection.

The screw is the only moving part contacting material, and is driven beyond the discharge point, preventing material contact with bearings or seals. It self-centers as it rotates, providing ample clearance between itself and the tube wall to eliminate or minimize grinding, while creating a gentle rolling action that prevents segregation of the most disparate blends.

Constructed of #316 stainless steel finished to sanitary standards, the mobile system is equipped with a low profile hopper with bag support tray; quick-release clean-out cap; quick-disconnect discharge access cover; and stainless control panel, conduit and liquid-tight compression fittings, allowing wash down and/or conveying of corrosive materials.

Ready to plug in and run, it includes HMI controls for manual or automatic start/stop and speed adjustment, and a manual hydraulic jack to raise and lower the support boom and conveyor assembly.

A broad range of screws with specialized geometries is available to handle free- and non-free-flowing materials, including products that pack, cake or smear.



*Flexicon Mobile Tilt-down Flexible Screw Conveyor with support boom positioned against and parallel to the conveyor tube can maneuver through low headroom areas, discharge in restricted spaces throughout the plant, and then roll to a wash down station.*

**flexicon®**

**USA**

FLEXICON CORPORATION  
Tel: +1 610 814 2400  
E-mail: [sales@flexicon.com](mailto:sales@flexicon.com)  
Web: [www.flexicon.com](http://www.flexicon.com)