




Automated Bulk Bag Conditioner Loosens Solidified Materials

Z-1260

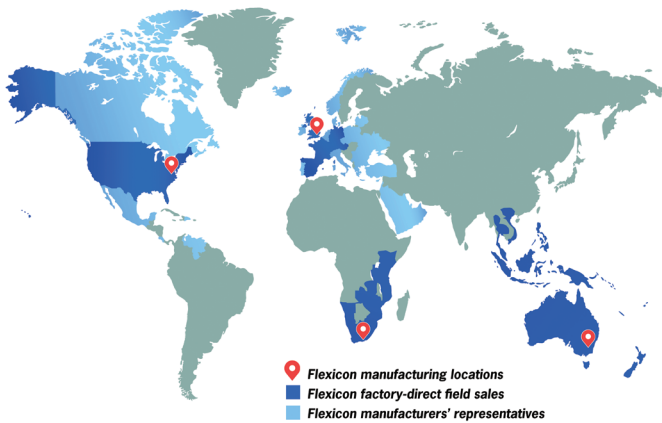

flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON EUROPE SAS
Tel: +33 7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

Automated Bulk Bag Conditioner Loosens Solidified Materials

Bulk bags can be loaded, raised and lowered using the hoist, and rotated manually, for conditioning at all heights on all sides.

This BLOCK-BUSTER® Bulk Bag Conditioner features a hydraulically-actuated, variable-height turntable for automated in-frame bag rotation and conditioning of bulk bags at varying heights. The number and pressure of hydraulic ram actuations, the height of the turntable, and the degree of rotation are user-programmable.

Two hydraulic rams with specially contoured end plates, press opposing sides and corners of bulk bags, loosening material that has solidified during storage and shipment, enabling bulk bag unloaders to discharge it through bag spouts.

A cantilevered I-beam with motorized hoist and trolley allows loading and unloading of bulk bags without the need for a forklift.

The system controller and hydraulic pump can be mounted on the exterior of the safety cage or remotely. The conditioner is fully enclosed on all four sides for operator safety and includes full-height doors that are interlocked to disallow operation of the system when the doors are open.

The conditioner is recommended for bulk bags containing hygroscopic chemicals, certain spice blends, heat-sensitive products, and other materials prone to solidifying to the point at which pneumatically-actuated flow promotion accessories integral to bulk bag dischargers are inefficient or completely ineffective.

The conditioner is also offered without a variable-height turntable, in which case the bag is raised and lowered using the motorized hoist, and rotated manually, for conditioning of the bag at any height and any degree of rotation.

The conditioner is offered as a stand-alone unit or integrated with the company's BULK-OUT® bulk bag discharging systems.



flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com