


FLEXICON CONFIGURATIONS



Bulk Bag Discharger with Safety Cage

HH-0992

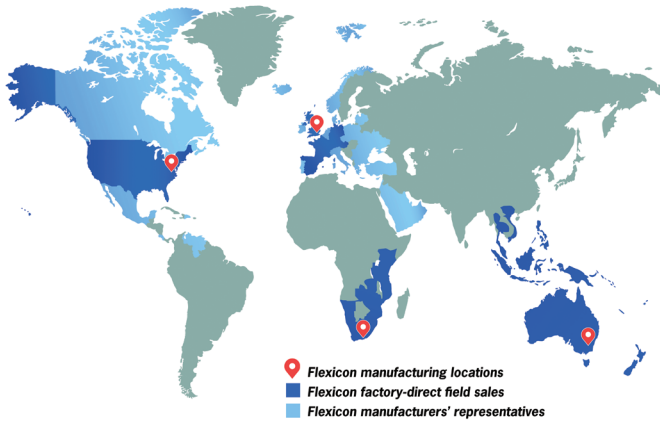

📍 Flexicon manufacturing locations
■ Flexicon factory-direct field sales
■ Flexicon manufacturers' representatives

flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON EUROPE SAS
Tel: +33 7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

Bulk Bag Discharger Feeds Vacuum Lines Dust-Free

This BULK-OUT® Model BFF Bulk Bag Discharger features a steel safety cage to prevent contact with moving parts during operation and automated unloading of bulk bags. The enclosure features externally-mounted controls and full height doors with an Intrinsically Safe Relay (ISR) that halts operation when the door is open.

The discharger is equipped with top-mounted receiving cups and a removable bag-lifting frame for forklift loading of bulk bags. Z-CLIP™ strap holders at the frame extremities allow rapid, secure insertion and removal of bag straps.

A manual SPOUT-LOCK® clamp ring positioned atop a pneumatically-actuated TELE-TUBE® telescoping tube provides quick, dust-tight connections between the bag spout and hopper, and maintains downward tension on the spout as the bag empties to eliminate creases, folds or bulges that could hinder material flow.

Additional flow promotion is afforded by FLOW-FLEXER® bag activators that raise and lower opposite bottom sides of the bag at timed intervals, loosening compacted material and directing it into the discharge spout. As the bag lightens, the stroke of the bag activators increases, raising the bag bottom into a steep “V” shape, while top-mounted POP-TOP™ extension devices elongate the entire bag, promoting total discharge with no manual intervention.

The universal flanged outlet of the hopper allows connection of a rotary airlock or charging adapter to feed optional pneumatic or mechanical conveyors, or other downstream equipment.

The discharger is constructed of carbon steel with durable industrial finish and stainless steel material contact surfaces, and available in all-stainless steel finished to food, dairy or pharmaceutical standards.



Steel safety enclosure of BULK-OUT® Model BFF Bulk Bag Discharger ceases operation of moving parts when safety interlocked doors are open.

flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com