


Low Profile Flexible Screw Conveyor

R-0310

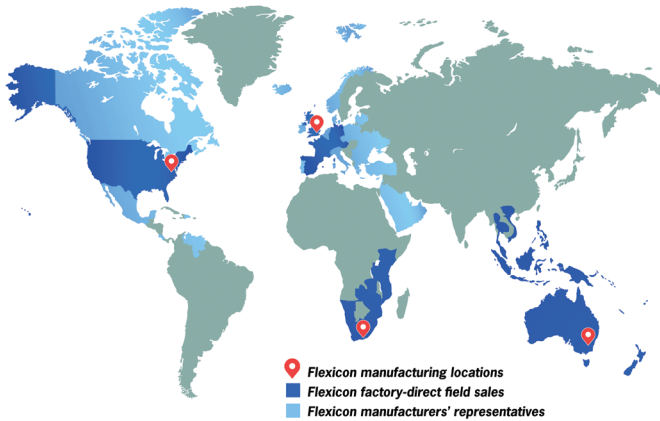

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON EUROPE SAS
Tel: +33 7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

Low Profile Flexible Screw Conveyor

Flexicon's Low Profile Flexible Screw Conveyor (also known as a helix conveyor, screw conveyor, spiral conveyor or auger conveyor) positions the drive motor at the inlet end of the conveyor tube, allowing the discharge end to fit within limited headroom areas typically encountered above weigh hoppers or other receiving vessels.

The enclosed, dust-free conveyor can move material vertically, horizontally or at any angle, through small holes in walls or ceilings, and can handle products ranging from sub-micron powders to large pellets, including those that pack, cake, plug, seize, smear or fluidize, with no separation of blended products.

The only moving part contacting material is a flexible inner screw, maximizing reliability while reducing maintenance. The removable screw and tube interior are smooth and crevice-free, allowing rapid, thorough cleaning.

Low Profile Flexible Screw Conveyors are offered in diameters from 2-5/8 to 8 in. (64 to 203 mm) in stationary and mobile configurations to industrial, food, dairy and pharmaceutical standards, with optional hoppers, flow promotion devices, sensors, controllers and interchangeable screw designs to satisfy wide-ranging material and process requirements.



Drive motor at material inlet allows conveyor to fit in low headroom areas.

flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com