




Mobile Sanitary Bulk Bag Discharger

JJ-0915

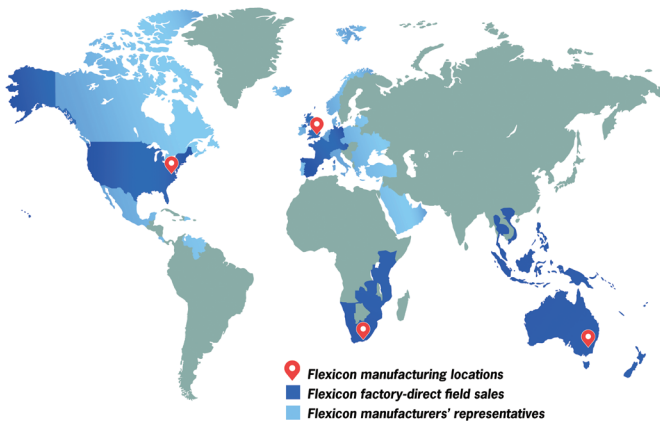

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON EUROPE SAS
Tel: +33 7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

Mobile Sanitary Bulk Bag Discharger

Flexicon's Mobile Sanitary Bulk Bag Discharger with stainless steel material contact surfaces allows discharging of contamination-sensitive bulk solid materials to downstream processes, dust-free.

Mounted on casters for in-plant mobility, the BULK-OUT® BFF Series discharger frame features four adjustable extension posts to accommodate bulk bags 36 in. to 84 in. (914 to 2134 mm) tall. The removable bag-lifting frame with Z-CLIP™ strap holders allows bulk bags to be attached at ground level, then forklifted into receiving cups atop the discharger frame.

The bulk bag/hopper interface is comprised of a manual SPOUT-LOCK® clamp ring for high-integrity bag spout connections, and a pneumatically-actuated TELE-TUBE® telescoping tube that exerts continuous downward tension on the clamp ring and bag spout as the bag empties and elongates, promoting flow and evacuation.

Additional flow is afforded by FLOW-FLEXER® bag activators that raise and lower opposite bottom sides of the bag at timed intervals into a steep "V" shape, promoting total discharge with no manual intervention.

The integral hopper can be equipped with a metering device for pneumatic or tubular cable conveying lines, a charging adapter for flexible screw conveyors, or a universal flanged outlet for connection to other downstream process equipment or storage vessels.

The entire unit can be rolled to various destinations throughout the plant, eliminating the cost of multiple stationary units and providing easy transport to a cleaning station between production runs.

Designed for ease of thorough cleaning, the adjustable extension posts are mounted outside of the frame posts instead of telescoping from within, while horizontal stainless steel members of round versus square tubing, minimize residual water and cleaning solutions clinging to the frame following wash down.

The system is also offered in all-stainless construction to food, dairy, pharmaceutical and industrial standards, and in carbon steel with durable industrial coatings.



Flexicon Mobile Sanitary Bulk Bag Discharger can be rolled to multiple destinations throughout the plant.

flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com