


FLEXICON CONFIGURATIONS



Open Chute Box Dumper

X-0735

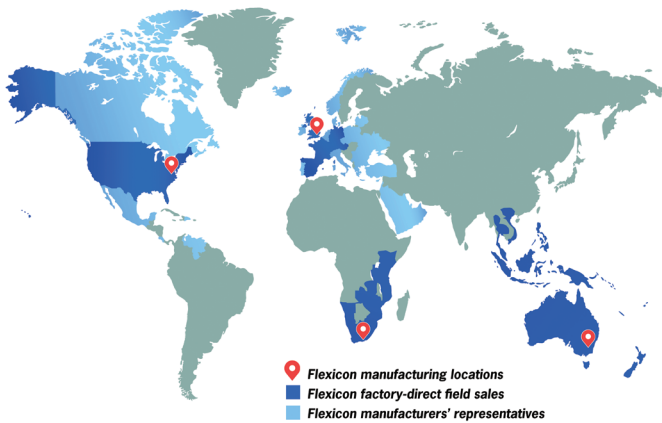

flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON EUROPE SAS
Tel: +33 7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

Open Chute Box Dumper

Flexicon's Open Chute Box Dumper offers a safe, low cost method of discharging bulk solid materials from boxes and other containers when dust containment is not a requirement.

The dumper accommodates Gaylords and other boxes from 36 in. to 48 in. (915 mm to 1220 mm) on a side and 39 in. to 44 in. (990 mm to 1117 mm) overall height.

The box-container lift assembly is tipped hydraulically until material discharges from the container onto a smooth, flat chute that allows unobstructed discharge of free-flowing materials — as well as non-free-flowing products containing large agglomerates — into receiving vessels.

Twin hydraulic cylinders pivot the platform-chute assembly, with the container secured from sliding by transverse sidewall braces, to discharge angles of 45 or 60 degrees beyond horizontal, including a motion-dampening feature at the termination of container rotation.

The dumper is available in carbon steel with durable industrial coatings, with stainless steel material contact surfaces (shown), or in all-stainless construction to industrial and sanitary standards.

It is also available with optional receiving hoppers configured with the company's mechanical (shown) or pneumatic conveyors to transport discharged material to any plant location.



flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com