




Twin Flexible Screw Conveyor with Common Hopper, Mobile Base

GG-0745

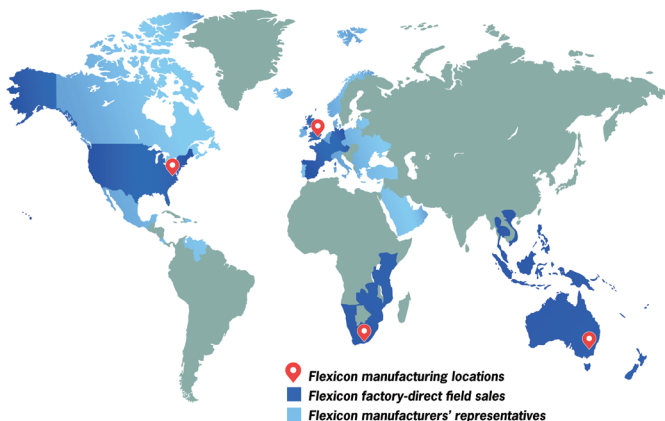

● Flexicon manufacturing locations
■ Flexicon factory-direct field sales
■ Flexicon manufacturers' representatives

flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON EUROPE SAS
Tel: +33 7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

Twin Flexible Screw Conveyor with Common Hopper, Mobile Base

Flexicon's Twin BEV-CON™ Flexible Screw Conveyor system is equipped with a common hopper and mobile base constructed and finished to sanitary standards.

Ready to plug-in and run, the self-contained system can fill two vessels with the same material simultaneously. Mounted on a frame with locking casters for in-plant mobility, it can be utilized in multiple locations, and rolled to a wash down booth.

The hopper is equipped with dual discharge adapters, each of which charges a BEV-CON™ flexible screw engineered to move free- and non-free-flowing bulk materials that pack, cake, smear, fluidize, compress, or are otherwise problematic to convey.

As material is conveyed, rotation of the screws causes them to self-center in the polymer conveyor tubes, eliminating or minimizing contact with the tube wall, preserving material integrity. The rolling action of material also prevents the separation of blended products comprised of disparate sizes, shapes and bulk densities.

The screws are the only moving part contacting material, and are driven beyond the point at which material is discharged, eliminating wear and contamination related to product contacting seals and bearings.

Discharge housings of the conveyors are supported by dual booms cantilevered from the mobile base, allowing discharge of material into processing equipment or storage vessels up to 12 ft (3.7 m) above the plant floor.

The hopper has a capacity of 20 cu ft (550 L), and is designed with a steep back wall and diametrically opposed side walls skewed to form a trapezoidal area, the divergent angles causing non-free-flowing material to topple into the conveyor charging adapters.

The unit is constructed of 316 stainless steel, and features sanitary quick-release clean out caps, quick-disconnect discharge box access covers, wash-down motors, and a stainless NEMA 4X control panel with stainless conduit and liquid-tight compression fittings that permit wash down during changeovers and/or when conveying of corrosive materials. HMI controls allow manual and automatic start/stop and speed adjustment.



Twin BEV-CON™ Flexible Screw Conveyor system with common hopper and mobile base transfers difficult-to-convey materials and blends at multiple plant locations, and can be rolled to a wash-down station for sanitizing.

flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com