




Pneumatic Weigh Batching/ Blending System for Free-Flowing Bulk Materials

Q-0888

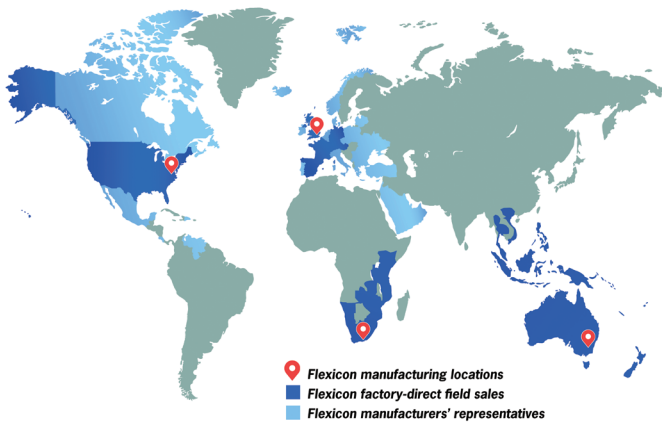

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON EUROPE SAS
Tel: +33 7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

Pneumatic Weigh Batching/Blending System for Free-Flowing Bulk Materials

Pneumatically receives and weighs multiple bulk materials while blending previously weigh batches

Flexicon's weigh batching and blending system for free-flowing bulk materials pneumatically receives and weighs multiple bulk materials while blending previously weigh batches, shortening cycle times significantly.

The filter receiver of the pneumatic conveying system is mounted on load cells, enabling the system controller to weigh each incoming material in sequence by starting and stopping the pneumatic conveyor.

Accumulated ingredients comprising a batch are automatically discharged via slide gate valve into a ribbon blender, immediately after which a subsequent batching cycle can commence.

Simultaneous weigh batching and blending with automated discharging of both operations can double the capacity of load-cell-mounted blenders also serving as gain-in-weight receiving vessels.

In addition to the filter receiver and weigh batching controls, pneumatic conveying systems are available complete with vacuum pump/pressure blower and rotary airlock valves for sourcing multiple batch ingredients from storage vessels and process equipment located throughout the plant.



Accumulated ingredients automatically discharged via slide gate valve

flexicon®

USA

FLEXICON CORPORATION
Tel: +1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com