
### **PRODUCT CONFIGURATIONS**



#### **EE-0298**

# Bulk Bag Weigh Batching System with Integral Tubular Cable Conveyor



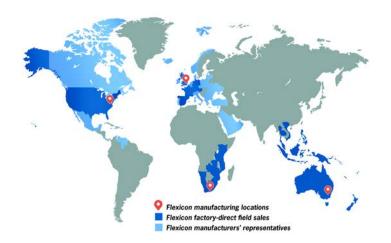

#### USA

FLEXICON CORPORATION Tel: 1 888 FLEXICON (1 888 353 9426) Tel: 1 610 814 2400 E-mail: sales@flexicon.com Web: www.flexicon.com

#### FRANCE

FLEXICON (EUROPE) LTD Tel: +33 (0)7 61 36 56 12 E-mail: ventes@flexicon.fr Web: www.flexicon.fr

#### UK

FLEXICON (EUROPE) LTD Tel: +44 (0)1227 374710 E-mail: sales@flexicon.co.uk Web: www.flexicon.co.uk

#### GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

#### **AUSTRALIA**

FLEXICON CORPORATION (AUSTRALIA) PTY LTD Tel: +61 (0)7 3879 4180 E-mail: sales@flexicon.com.au Web: www.flexicon.com.au

#### SINGAPORE

FLEXICON SINGAPORE PTE LTD Tel: +65 6778 9225 E-mail: sales@flexicon.com.sg Web: www.flexicon.com.sg

#### **SOUTH AFRICA**

FLEXICON AFRICA (PTY) LTD Tel: +27 (0)41 453 1871 E-mail: sales@flexicon.co.za Web: www.flexicon.co.za

#### INDONESIA

FLEXICON SINGAPORE PTE LTD Tel: +62 81 1103 2400 E-mail: sales@flexicon.co.id Web: www.flexicon.co.id

#### **SPAIN**

FLEXICON EUROPE SPAIN S.L. Tel: +34 930 020 509 E-mail: ventas@flexicon.es Web: www.flexicon.es

#### MALAYSIA

FLEXICON SINGAPORE PTE LTD Tel: +60 10 282 2400 E-mail: sales@flexicon.com.my Web: www.flexicon.com.my

## **Bulk Bag Weigh Batching System with Integral Tubular Cable Conveyor**

This automated Bulk Bag Weigh Batching System from Flexicon Corporation meters ingredients into a FLEXI-DISC® Tubular Cable Conveyor that transports batches of a specified weight to downstream processing equipment, dust-free.

The BULK-OUT® BFC Series Bulk Bag Discharger features a cantilevered I-beam with electric hoist and trolley for loading and unloading of bulk bags without the use of a forklift. FLOW-FLEXER® bag activators raise and lower opposite bottom edges of the bag at timed intervals, promoting continuous and complete discharge of free- and non-free-flowing materials through the bag spout.

The discharger rests on load cells that signal a PLC to stop a vibratory feeder that meters material into the conveyor once a pre-programmed batch weight has been metered out.

Low-friction polymer discs attached to stainless steel cable within stainless steel conveyor tubing, gently and smoothly transport friable food and non-food products, and fully evacuate the conveyor of material to achieve accurate batch weights.

The discs and cable are driven by a wheel at one end of the circuit and put under tension by a wheel at the other end. The conveyor tubing can be routed horizontally, vertically, or at any angle, around corners or through small holes in plant walls. Inspection windows can be added to any straight run of tubing.

The conveyor can accommodate multiple metered inlets for primary ingredients and non-metered inlets for minor ingredients, as well as multiple full-flow outlets and valved outlets for selective distribution of materials.



The automated Bulk Bag Weigh Batching System from Flexicon meters ingredients from a Bulk Bag Discharger into a FLEXI-DISC® Tubular Cable Conveyor that transports batches of a specified weight to a downstream process.