


PRODUCT CONFIGURATIONS



JJ-0693

Bulk Box, Tote and Bin Filler

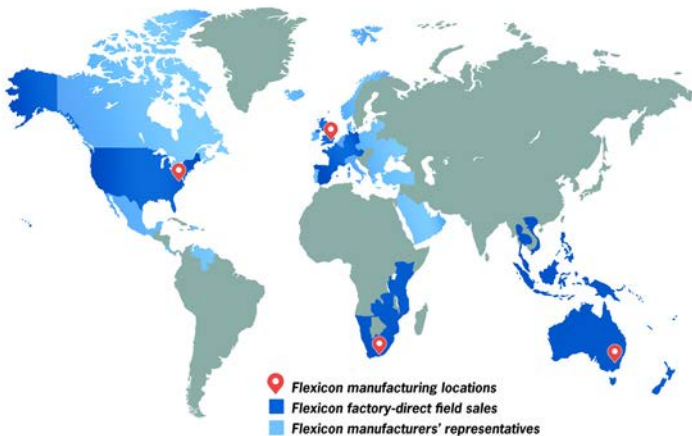

flexicon®

USA

FLEXICON CORPORATION
Tel: 1 888 FLEXICON
(1 888 353 9426)
Tel: 1 610 814 2400
E-mail: sales@flexicon.com
Web: www.flexicon.com

UK

FLEXICON (EUROPE) LTD
Tel: +44 (0)1227 374710
E-mail: sales@flexicon.co.uk
Web: www.flexicon.co.uk

AUSTRALIA

FLEXICON CORPORATION
(AUSTRALIA) PTY LTD
Tel: +61 (0)7 3879 4180
E-mail: sales@flexicon.com.au
Web: www.flexicon.com.au

SOUTH AFRICA

FLEXICON AFRICA (PTY) LTD
Tel: +27 (0)41 453 1871
E-mail: sales@flexicon.co.za
Web: www.flexicon.co.za

SPAIN

FLEXICON EUROPE SPAIN S.L.
Tel: +34 930 020 509
E-mail: ventas@flexicon.es
Web: www.flexicon.es

FRANCE

FLEXICON (EUROPE) LTD
Tel: +33 (0)7 61 36 56 12
E-mail: ventes@flexicon.fr
Web: www.flexicon.fr

GERMANY

FLEXICON EUROPE GmbH
Tel: +49 173 900 78 76
E-mail: vertrieb@flexiconeurope.de
Web: www.flexicondeutschland.de

SINGAPORE

FLEXICON SINGAPORE PTE LTD
Tel: +65 6778 9225
E-mail: sales@flexicon.com.sg
Web: www.flexicon.com.sg

INDONESIA

FLEXICON SINGAPORE PTE LTD
Tel: +62 81 1103 2400
E-mail: sales@flexicon.co.id
Web: www.flexicon.co.id

MALAYSIA

FLEXICON SINGAPORE PTE LTD
Tel: +60 10 282 2400
E-mail: sales@flexicon.com.my
Web: www.flexicon.com.my

Bulk Box, Tote and Bin Filler

Flexicon's Basic Filler for bulk boxes, totes, bins or other intermediate bulk containers (IBCs) loads bulk solid materials free of dust, at low cost.

The unit's fill head can be raised or lowered using a forklift and secured with clevis pins to minimize the clearance between the rectangular dust hood and the opening of IBCs ranging from 48 to 78 in. (1219 to 1981 mm) tall.

A fill head port can be vented to a filter sock to contain displaced dust, or to a central bag house that causes a clear flexible skirt to vacuum-seal against the container's exterior, increasing dust containment effectiveness.

Performance can be enhanced by a vibratory deck to densify and stabilize the material during filling, and/or load cells that signal a PLC when to stop the flow of material by stopping a conveyor or closing a rotary valve or slide gate once a programmed weight is gained.

Rated for loads up to 6500 lb (2948 kg), the frame is offered in carbon steel with durable industrial coating, with stainless steel material contact surfaces, or in all-stainless construction to industrial or sanitary standards.

It can be integrated with Flexicon mechanical or pneumatic conveying systems, or the user's upstream process equipment or storage vessels.



Flexicon's basic IBC Filler is offered with optional densification deck, fill-by-weight controls, and material delivery conveyors.